

Valspar's Alamo White coatings provide excellent exterior durability as well as resistance to sun, rain and other natural elements in moderate climates. This two-coat coil coating system minimizes abrasions often caused by fabricating, handling, transporting and on-site construction incidents. It can also be embossed for an elevated aesthetic appeal. Available in a polyester or a siliconized modified polyester, WeatherXL, resin coating system.



## BENEFITS

- Exceptional resistance to sun, rain and other natural elements
- Superior scratch resistance
- Exceptional dirt and stain resistance
- Excellent overall adhesion
- Great flexibility and formability

## USDA-COMPLIANT

Alamo White is available in a USDA-compliant formulation if desired, recommended for situations where incidental contact with food occurs.

## SUBSTRATES

May be applied to pretreated Galvalume® and hot-dip galvanized (HDG) steel.

## END USES

Alamo White coatings are ideal for long-life external use on agricultural buildings, light commercial and pre-engineered buildings, including:

- Architectural metal siding and roofing systems
- Interior liner panels, doors and trim
- Other metal building components

## AT YOUR SERVICE

Do you have a unique application? We'll work with you to find a solution. Want a unique color? We'll create it for you. Need a quick turnaround? Talk to us, and we'll help you get your project completed on time. We're here to help. In fact, with our availability at coating and service centers throughout the country, we're there for you. Give us a call and see how we can help with your next project.


**Coil Customer Service: 888-306-2645 — [coilhelp@valspar.com](mailto:coilhelp@valspar.com)**

## COMMITMENT TO QUALITY — TECHNICAL DATA: ALAMO WHITE

Our coatings are trusted and field proven through rigorous testing, providing key benefits to our customers.	Coating System	Polyester and Siliconized Modified Polyester
	Number of Coats	2 coat
	Dry Film Thickness (DFT)	Color Coat: 0.7 - 0.8 mils Primer: 0.2 - 0.3 mils; Total DFT: 0.9 - 1.1 mils
	Industry Specification Compliance	AAMA 2603-15*
	Substrates	Applied to pretreated Galvalume® and hot-dip galvanized (HDG) steel
Superior coating adhesion to substrate.	Cross Hatch Adhesion, ASTM D 3359	No loss of adhesion
Outstanding resistance to graffiti.	Graffiti Resistance, ASTM D 6578 / D 6578M	Meets and exceeds
Long-lasting durability against nature.	Impact Resistance (direct), ASTM D 2794	Steel: 3x metal thickness inch-pounds, no loss of adhesion
Excellent protection against scratches.	Pencil Hardness, ASTM D 3363	F to 2H
Multiple gloss levels providing the desired finish.	Specular Gloss at 60°, ASTM D 523	30 to 40
Great flexibility and formability during the manufacturing process.	T-Bends, ASTM D 4145	2T to 4T, no loss of adhesion

### ALAMO WHITE TWO COAT SYSTEM

Two-coat polyester resin system with total Dry Film Thickness (DFT) of 0.9 - 1.1 mils.

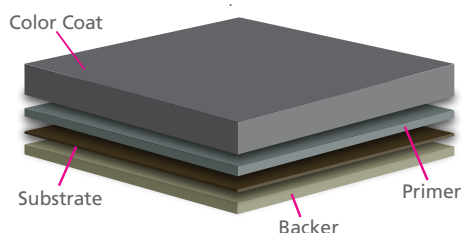

Color Coat: 0.6 - 0.9 mils    Primer: 0.2 - 0.3 mils  
Backer: 0.3 - 0.4 mils

\*American Architectural Manufacturers Association. \*\*American Society for Testing and Materials.

For details and health, safety and handling information, Material Safety Data Sheets (MSDS) are available at [www.valsparcoilextrusion.com](http://www.valsparcoilextrusion.com).

Alamo White® is a registered trademark of The Valspar Corporation.

VALSPAR MAKES NO WARRANTIES, EXPRESS OR IMPLIED, AND DISCLAIMS ALL IMPLIED WARRANTIES INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE. VALSPAR WILL NOT BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Valspar Coil and Extrusion Coating Division  
Phone: 866-351-6900  
Email: [extrusionhelp@valspar.com](mailto:extrusionhelp@valspar.com)  
[www.valsparcoilextrusion.com](http://www.valsparcoilextrusion.com)

2017 ©The Valspar Corporation. All Rights Reserved

valspar®